



Panel 62x62 CCT Variable UGR<19

Panel 62x62 CCT Changeable UGR<19

PNM36CC62U

EAN: 8436546695325

*Regulación opcional 1-10V dependiendo de la fuente de alimentación
Optional dimming 1-10V depending on the power supply

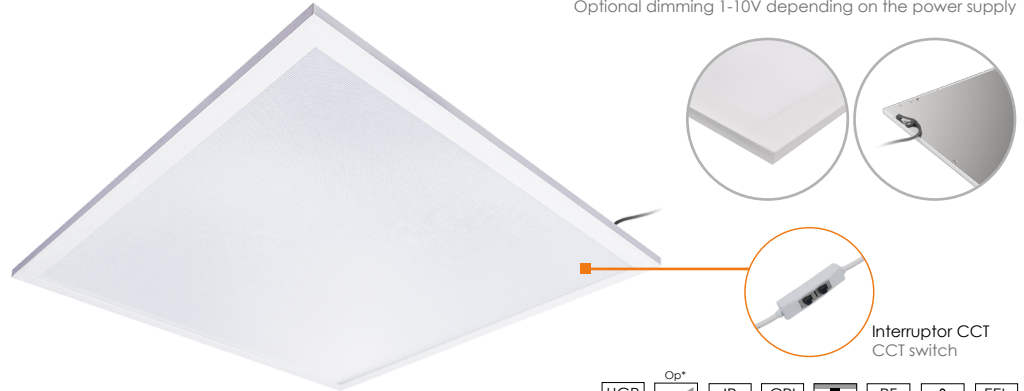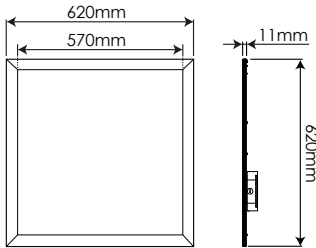

Acabado: Traslúcido	Cover: Milky
Material del difusor: Policarbonato	Diffuser material: Polycarbonate
Material del marco: Aleación de aluminio en blanco	Frame material: White aluminum alloy
Sustituye: 4 x T8 18W + Luminaria	Substitute: 4 x T8 18W + Fixture
Consumo: 36W	Consumption: 36W
Tensión de trabajo: 220-240V AC 50/60Hz	Working voltage: 220-240V AC 50/60Hz
Número de LEDs: 216 (MTLA2835WB)	Number of LEDs: 216 (MTLA2835WB)
Temperatura de color: 5000K-4000K-3000K	Color temperature: 5000K-4000K-3000K
Flujo luminoso: 3600 Lumens	Luminous flux: 3600 Lumens
Eficiencia lumínica: 100 Lm/W	Lm/W Efficiency: 100 Lm/W
Tamaño: (largo)620mm x (ancho)620mm x (alto)11mm	Size: (length)620mm x (ancho)620mm x (height)11mm
Vida útil: 47000 horas	Lifespan: 47000 hours
Garantía: 5 años	Guarantee: 5 years
Datos de embalaje: 4 uds. por caja / (largo)680mm x (ancho)160mm x (alto)630mm / 12Kg	Packing details: 4 uds. por caja / (largo)680mm x (ancho)160mm x (alto)630mm / 12Kg