



Tubes T5 - Standard & High Power

ELECTRONIC BALLAST COMPATIBLE

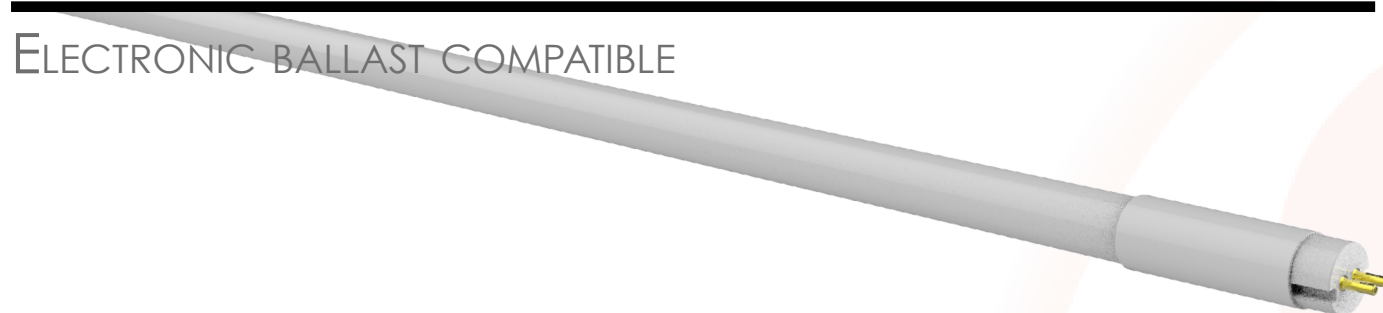

OPTIONAL TRANSPARENT COVER
Luminous flux 6% up
Beam angle 120°



IP 20	CRI >80	Operating temp. -20~+45°C	Power factor >0,9	Lifespan 50.000h t ^a =25°C
----------	------------	------------------------------	----------------------	--

Standard

	Reference	Cover / Material	Color Light	Luminous Flux	Lm/W Efficiency	Power	Beam Angle	Working voltage	Connection	LEDs	Guarantee	Dimensions	Packing details
120cm	TLL216NW5	Milky / Glass (with PET film)	4000K	2400lm	150lm/W	16W	160°	220-240 VAC 50~60Hz	G5	120 SMALITE 2835 L5	5 years	(∅)15mm x (L)1163mm 150g	25 uts/box / (L)1218mm x (W)152mm x (H)158mm 5Kg
150cm	TLL518NW5		4000K	2800lm	150lm/W	18,5W				144 SMALITE 2835 L5		(∅)15mm x (L)1463mm 195g	25 uts/box / (L)1518mm x (W)152mm x (H)158mm 7Kg

High output

	Reference	Cover / Material	Color Light	Luminous Flux	Lm/W Efficiency	Power	Beam Angle	Working voltage	Connection	LEDs	Guarantee	Dimensions	Packing details
120cm	TLL227NW5	Milky / Glass (with PET film)	4000K	4100lm	150lm/W	27W	160°	220-240 VAC 50~60Hz	G5	138 SMALITE 2835 L5	5 years	(∅)15mm x (L)1163mm 150g	25 uts/box / (L)1218mm x (W)152mm x (H)158mm 5Kg
150cm	TLL526NW5		4000K	4000lm	150lm/W	26W				164 SMALITE 2835 L5		(∅)15mm x (L)1463mm 195g	25 uts/box / (L)1518mm x (W)152mm x (H)158mm 7Kg
	TLL537NW5		4000K	5600lm	150lm/W	37W				216 SMALITE 2835 L5		(∅)15mm x (L)1463mm 195g	25 uts/box / (L)1518mm x (W)152mm x (H)158mm 7Kg

*If T5 tube is installed with a not compatible ECG, guarantee will not be available.

Compatible with

