


Downlight regulable 19cm corte 25W Blanco frío

Dimmable downlight 19cm cutout 25W Cool white

DLE25CW8D

EAN: 8436546692621

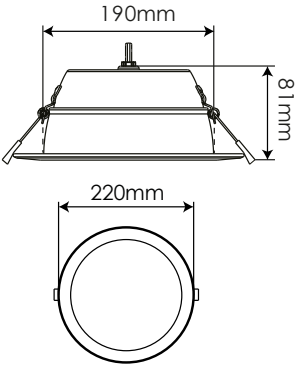


Acabado: Blanco	Cover: White
Material: Aluminio	Material: Aluminum
Sustituye: Downlight convencional 2x26W	Substitute: Standard downlight 2x26W
Consumo: 25W	Consumption: 25W
Tensión de trabajo: 100-240V AC 50~60Hz	Working voltage: 100-240V AC 50~60Hz
Número de LEDs: 60 (EPistar SMD 2835)	Number of LEDs: 60 (EPistar SMD 2835)
Temperatura de color: 5000K	Color temperature: 5000K
Flujo luminoso: 2200 Lumens	Luminous flux: 2200 Lumens
Eficiencia lumínica: 88 Lm/W	Lm/W Efficiency: 88 Lm/W
Tamaño: (Ø)220mm x (altura)81mm	Size: (Ø)220mm x (height)81mm
Diámetro de corte: 190mm	Cutting diameter: 190mm
Vida útil aproximada: 40000 horas	Lifespan: 40000 hours
Garantía: 2 años	Guarantee: 2 years
Datos de embalaje: 16 uds. por caja / (largo)980mm x (ancho)490mm x (alto)230mm / 16Kg	Packing details: 16 uts. per box / (length)980mm x (width)490mm x (height)230mm / 16Kg

Downlight regulable 19cm corte 25W Blanco cálido

Dimmable downlight 19cm cutout 25W Warm white

DLE25WW8D

EAN: 8436546692645

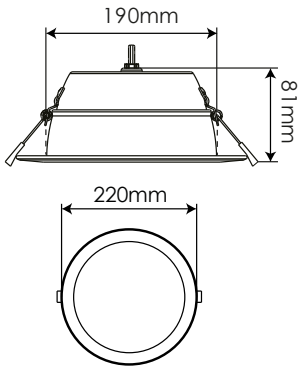

Acabado: Blanco	Cover: White
Material: Aluminio	Material: Aluminum
Sustituye: Downlight convencional 2x26W	Substitute: Standard downlight 2x26W
Consumo: 25W	Consumption: 25W
Tensión de trabajo: 100-240V AC 50~60Hz	Working voltage: 100-240V AC 50~60Hz
Número de LEDs: 60 (EPistar SMD 2835)	Number of LEDs: 60 (EPistar SMD 2835)
Temperatura de color: 3000K	Color temperature: 3000K
Flujo luminoso: 2000 Lumens	Luminous flux: 2000 Lumens
Eficiencia lumínica: 80 Lm/W	Lm/W Efficiency: 80 Lm/W
Tamaño: (Ø)220mm x (altura)81mm	Size: (Ø)220mm x (height)81mm
Diámetro de corte: 190mm	Cutting diameter: 190mm
Vida útil aproximada: 40000 horas	Lifespan: 40000 hours
Garantía: 2 años	Guarantee: 2 years
Datos de embalaje: 16 uds. por caja / (largo)980mm x (ancho)490mm x (alto)230mm / 16Kg	Packing details: 16 uts. per box / (length)980mm x (width)490mm x (height)230mm / 16Kg