



# Lighting Frames

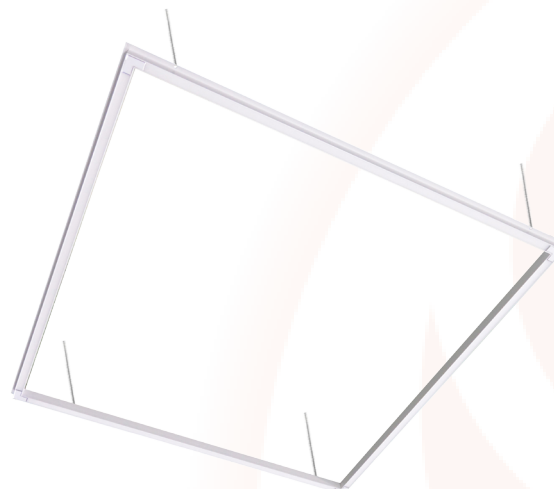

Optional  Dimmable 1-10V | Connection L-N | IP 20 | CRI >80 | Operating temp. -20~+40°C | Power factor >0,9 | Lifespan 48.000h t<sup>a</sup>=25°C

		Reference	EAN Code	Cover / Material	Color Light	Luminous Flux	Lm/W Efficiency	Power	Beam Angle	Working voltage	LEDs	Guarantee	Dimensions	Packing details
60x60	Cool White	PF30CW60	8436546694694	Milky / Polycarbonate + Aluminum alloy	5000K	3100lm	103Lm/W	30W	110°	220-240 VAC 50~60Hz	120 RUNLITE T2835	3 years	(L)587mm x (W)587mm x (H)15mm 1 Kg	10 uts/box (L)635mm x (W)34mm x (H)635mm 12 Kg
	Neutral White	PF30NW60	8436546694700		4000K	3100lm	103Lm/W							
	Warm White	PF30WW60	8436546694717		3000K	2800lm	93Lm/W							
62x62	Cool White	PF30CW62	8436546694724		5000K	3100lm	103Lm/W							
	Neutral White	PF30NW62	8436546694731		4000K	3100lm	103Lm/W							
	Warm White	PF30WW62	8436546694748		3000K	2800lm	93Lm/W							