




Street Lights

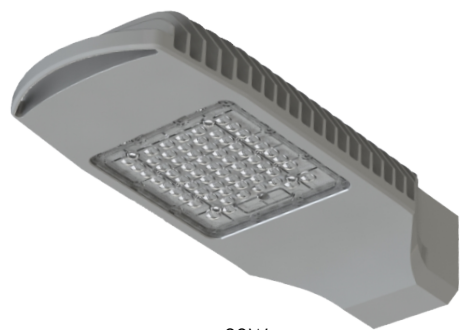

30W
50W

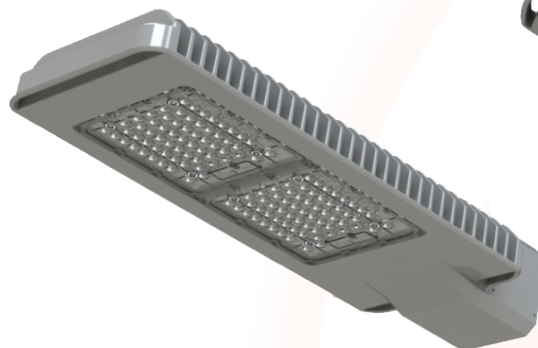

110W

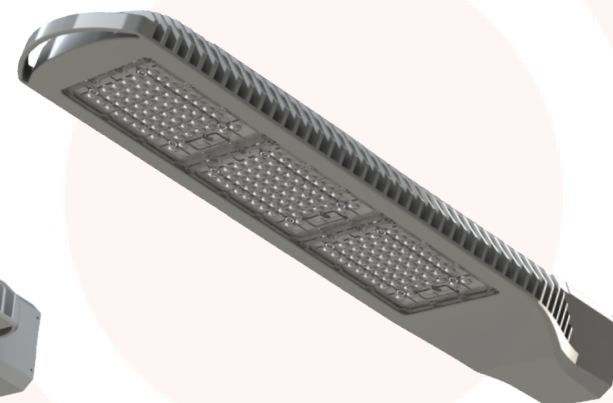

160W



Optional bracket



| | | | | | | |
|----------------------|----------|----------|------------|------------------------------|-----------------------|--|
| Connection L-N-PE | KV 10 | IP 67 | CRI >70 | Operating temp. -40~+45°C | Power factor >0,95 | Lifespan 50.000h t ^a =25°C |
|----------------------|----------|----------|------------|------------------------------|-----------------------|--|

| | Reference | EAN Code | Cover /Material | Color Light | Luminous Flux | Lm/W Efficiency | Power | Beam Angle | Working voltage | LEDs | Guarantee | Dimensions | Packing details |
|------|-----------|---------------|-----------------------------------|-------------|---------------|-----------------|-------|------------|---------------------------|----------------------|-----------|--|--|
| 30W | STLH30CW | 8436546692355 | Grey / Die-casting aluminum | 5700K | 3600lm | 120Lm/W | 30W | 60°/120° | 100-277 VAC 50~60Hz | 63 LUMILEDS 3030 | 5 years | (L)385mm (W)160mm (H)90mm 3,8Kg | 1 ut/box (L)460mm x (W)245mm x (H)135mm 5Kg |
| 50W | STLH50CW | 8436546692379 | | | 6000lm | 120Lm/W | 50W | | | 63 LUMILEDS 3030 | | (L)385mm (W)160mm (H)90mm 3,8Kg | 1 ut/box (L)460mm x (W)245mm x (H)135mm 5Kg |
| 110W | STLH110CW | 8436546692409 | | | 13200lm | 120Lm/W | 110W | | | 126 LUMILEDS 3030 | | (L)490mm (W)180mm (H)90mm 5,6Kg | 1 ut/box (L)560mm x (W)245mm x (H)135mm 6,3Kg |
| 160W | STLH160CW | 8436546692423 | | | 19200lm | 120Lm/W | 160W | | | 189 LUMILEDS 3030 | | (L)635mm (W)180mm (H)90mm 8,8Kg | 1 ut/box (L)700mm x (W)245mm x (H)135mm 9,7Kg |