



LED downlight model DLI40CC10 branded Silversun, diameter 28cm and beam angle 90°. White aluminum body and milky polycarbonate diffuser. Presetable colour switch 3000K-4000K-6000K, luminous flux 4000lm, color rendering index >80, power 40W, 220-240 VAC/ 50-60 Hz and protection index IP20. Dimensions diameter 279mm x height 94mm and weight 0,62 Kg. Cut out size 250mm.

LUMINOUS DATA

Luminous flux	4000 lm
Efficiency	100 lm/W
Colour rendering index CRI	≥80
Colour temperature	3000K-4000K-6000K
Colour chromatic (sdcm)	2.0 (3000K)

MECANICAL DATA

Body material	Aluminum
Body colour	White RAL9016
IP protection rate	IP20
IK protection rate	IK06
Cut out	240-255mm

LOGISTICAL DATA

EAN code	8436546695301
Device dimensions	Ø279x94mm
Device weight	0,62 kg
Units per box	10
Box dimensions	640x600x330mm
Box weight	11 kg

ELECTRICAL DATA

Power	40W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,9
Harmonic distortion THD	≤20%
Inrush current	30A
Max units per MCB C16	37
Dimmable	No
Driver	External
Class protection	Class II


OPTICAL DATA

Beam angle	90°
Diffuser model	Milky
Diffuser material	Polycarbonate

FUNCTIONAL DATA

Working temperature	-20°C a 40°C
Lifespan (L70B10 25°)	>113.000h

DISTRIBUTION

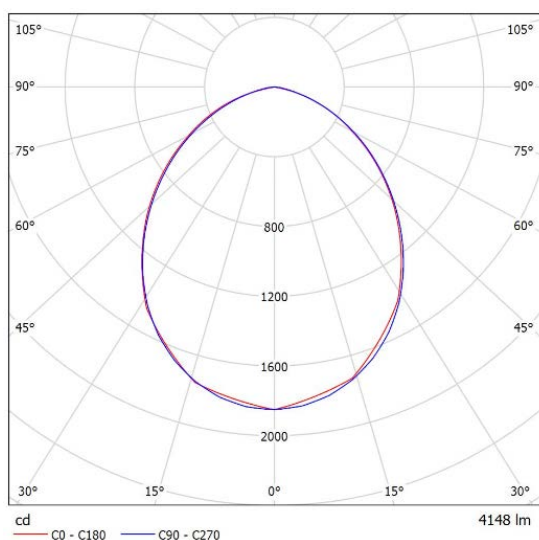

DIMENSIONS

