



LED downlight model DLI9CC6 branded Silversun, diameter 16,5cm and beam angle 90°. White aluminum body and milky polycarbonate diffuser. Presetable colour switch 3000K-4000K-6000K, luminous flux 950 lm, color rendering index >80, power 9W, 220-240 VAC/ 50-60 Hz and protection index IP20. Dimensions diameter 165mm x height 63mm and weight 0,22 Kg. Cut out size 140mm.

### LUMINOUS DATA

Luminous flux	1000 lm
Efficiency	111 lm/W
Colour rendering index CRI	≥80
Colour temperature	3000K-4000K-6000K
Colour chromatic (sdcm)	0,8 (3000K)

### MECHANICAL DATA

Body material	Aluminum
Body colour	White RAL9016
IP protection rate	IP20
IK protection rate	IK06
Cut out	135-145mm

### LOGISTICAL DATA

EAN code	8436546698319
Device dimensions	Ø165x63mm
Device weight	0,22 kg
Units per box	20
Box dimensions	450x410x410mm
Box weight	10 kg

### ELECTRICAL DATA

Power	9W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,9
Harmonic distortion THD	≤20%
Inrush current	15A
Max units per MCB C16	32
Dimmable	No
Driver	External
Class protection	Class II


### OPTICAL DATA

Beam angle	90°
Diffuser model	Milky
Diffuser material	Polycarbonate

### FUNCTIONAL DATA

Working temperature	-20°C a 40°C
Lifespan (L70B10 25°)	>113.000h

### DISTRIBUTION

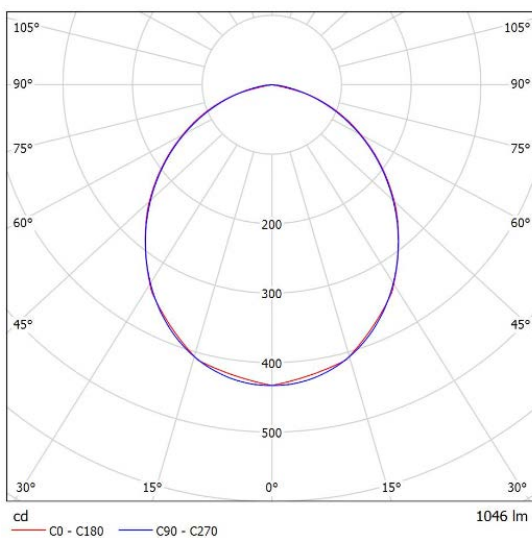

### DIMENSIONS

