



LED Slim downlight model DLIS18CC8 branded Silversun, diameter 25cm, beam angle 110°. White PVC body and milky polycarbonate diffuser. Presetable colour switch 3000K-4000K-6000K, luminous flux 1.500lm, color rendering index >80, power 18W, 220-240 VAC/ 50-60 Hz and protection index IP20. Dimensions diameter 244mm x height 38mm and weight 0,45 Kg. Cut out size 205mm.

### LUMINOUS DATA

Luminous flux	1.500 lm
Efficiency	83 lm/W
Colour rendering index CRI	≥80
Colour temperature	3000K-4000K-6000K
Colour chromatic (sdcm)	0,8 (3000K)

### MECHANICAL DATA

Body material	PVC
Body colour	White RAL9016
IP protection rate	IP20
IK protection rate	IK06
Cut out	198-210mm

### LOGISTICAL DATA

EAN code	8436546696155
Device dimensions	Ø244x38mm
Device weight	0,45 kg
Units per box	20
Box dimensions	525x325x530mm
Box weight	10 kg

### ELECTRICAL DATA

Power	18W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,9
Harmonic distortion THD	≤20%
Inrush current	-
Max units per MCB C16	143
Dimmable	No
Driver	On board
Class protection	Class II


### OPTICAL DATA

Beam angle	110°
Diffuser model	Milky
Diffuser material	Polycarbonate

### FUNCTIONAL DATA

Working temperature	-20°C a 40°C
Lifespan (L70B10 25°)	>113.000h

### DISTRIBUTION

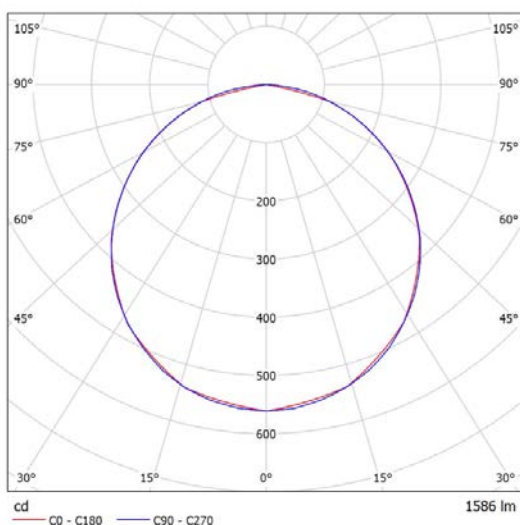

### DIMENSIONS

