



LED downlight model DLU28CC6 branded Silversun, diameter 23cm, beam angle 60° and glare rating index UGR<19. White aluminum body and milky polycarbonate diffuser. Presetable colour switch 3000K-4000K-6000K, luminous flux 3.100lm, color rendering index >80, power 28W, 220-240 VAC/ 50-60 Hz and protection index IP20. Dimensions diameter 232mm x height 113mm and weight 0,50 Kg. Cut out size 200mm.

LUMINOUS DATA

Luminous flux	3100 lm
Efficiency	110 lm/W
Colour rendering index CRI	≥80
Colour temperature	3000K-4000K-6000K
Colour chromatic (sdcm)	3,6 (3000K)

MECHANICAL DATA

Body material	Aluminum
Body colour	White RAL9016
IP protection rate	IP20
IK protection rate	IK06
Cut out	195-210mm

LOGISTICAL DATA

EAN code	8436546699316
Device dimensions	Ø232x113mm
Device weight	0,44 kg
Units per box	12
Box dimensions	550x550x450mm
Box weight	8 kg

ELECTRICAL DATA

Power	28W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,9
Harmonic distortion THD	≤10%
Inrush current	30A
Max units per MCB C16	37
Dimmable	No
Driver	External
Class protection	Class II


OPTICAL DATA

Beam angle	60°
Diffuser model	Milky
Diffuser material	Polycarbonate

FUNCTIONAL DATA

Working temperature	-20°C a 40°C
Lifespan (L70B10 25°)	>83.000h

DISTRIBUTION

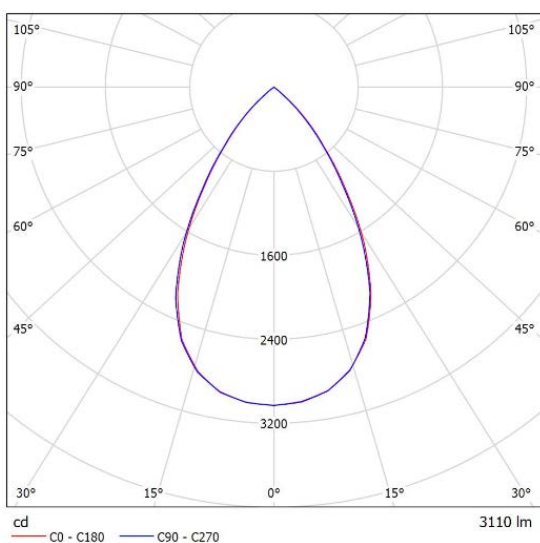

DIMENSIONS

