



Sports LED floodlight model FLC1200FW branded Silversun, 4 modules, diameter 52cm, beam angle 25°. Black aluminum body and polycarbonate optical lens diffuser. Colour temperature 5700K, luminous flux 162.000 lm, color rendering index >70, power 1200W, 100-277 VAC / 50-60 Hz and protection indexes IP65 and IK10. Dimensions diameter 520mm x depth 515mm and weight 23 Kg. Installation bracket included.

LUMINOUS DATA

Luminous flux	162.000 lm
Efficiency	135 lm/W
Colour rendering index CRI	≥70
Colour temperature	5700K
Colour chromatic (sdcM)	3,4

ELECTRICAL DATA

Power	1200W
Rated voltage	100-277V AC
Frequency	50/60Hz
Power factor	≥0,95
Harmonic distortion THD	<20%
Inrush current	13,4A
Max units per MCB C16	1
Dimmable	1-10V
Driver	Internal
Class protection	Class I

OPTICAL DATA

Beam angle	25°
Diffuser model	Optical Lens
Diffuser material	Polycarbonate

MECHANICAL DATA

Body material	Aluminum
Body colour	Black RAL9004
IP protection rate	IP65
IK protection rate	IK10


FUNCTIONAL DATA

Working temperature	-30°C a 40°C
Lifespan (L70B10 25°)	>163.000h

LOGISTICAL DATA

EAN code	8436546699378
Device dimensions	Ø520x515mm
Device weight	23 kg
Units per box	1
Box dimensions	620x570x415mm
Box weight	27 kg

DISTRIBUTION

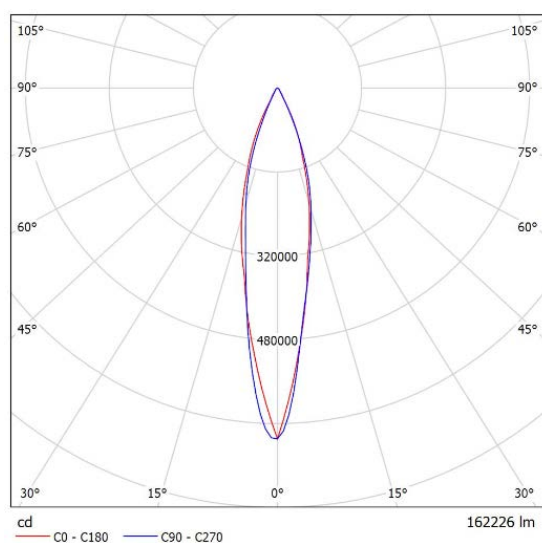

DIMENSIONS

