



LED floodlight model FLR100NW branded Silversun, 20x25cm, beam angle 110°. Black aluminum body and tempered glass transparent diffuser. Colour temperature 4000K, luminous flux 11.000 lm, color rendering index >70, power 100W, 220-240 VAC/ 50-60 Hz and IP66 protection rate. Dimensions length 200mm x height 250mm x width 30 mm, weight 1,6 Kg. Installation bracket included.

## LUMINOUS DATA

Luminous flux	11.000 lm
Efficiency	110 lm/W
Colour rendering index CRI	≥70
Colour temperature	4000K
Colour chromatic (sdcm)	1,0

## ELECTRICAL DATA

Power	100W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,95
Harmonic distortion THD	<10%
Inrush current	-
Max units per MCB C16	36
Dimmable	No
Driver	On board
Class protection	Class I

## OPTICAL DATA

Beam angle	110°
Diffuser model	Transparent
Diffuser material	Tempered Glass

## MECHANICAL DATA

Body material	Aluminum
Body colour	Black RAL9004
IP protection rate	IP66
IK protection rate	IK08


## FUNCTIONAL DATA

Working temperature	-40°C a 40°C
Lifespan (L70B10 25°)	>250.000h

## LOGISTICAL DATA

EAN code	8436546696476
Device dimensions	160x200x30mm
Device weight	1,6 kg
Units per box	10
Box dimensions	500x435x280mm
Box weight	18 kg

## DISTRIBUTION

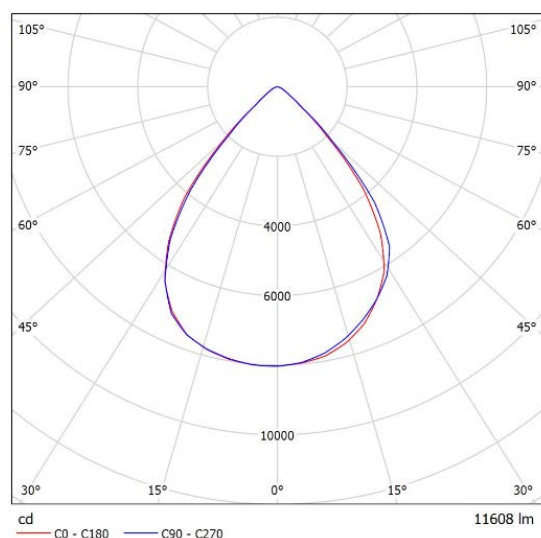

## DIMENSIONS

