



LED floodlight model FLR70CW branded Silversun, 16x20cm, beam angle 110°. Black aluminum body and tempered glass transparent diffuser. Colour temperature 5000K, luminous flux 7.700 lm, color rendering index >70, power 70W, 220-240 VAC/ 50-60 Hz and IP66 protection rate. Dimensions length 160mm x height 200mm x width 30 mm, weight 1,0 Kg. Installation bracket included.

### LUMINOUS DATA

Luminous flux	7.700 lm
Efficiency	110 lm/W
Colour rendering index CRI	≥70
Colour temperature	5000K
Colour chromatic (sdcm)	1,3

### ELECTRICAL DATA

Power	70W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,95
Harmonic distortion THD	<10%
Inrush current	-
Max units per MCB C16	36
Dimmable	No
Driver	On board
Class protection	Class I

### OPTICAL DATA

Beam angle	110°
Diffuser model	Transparent
Diffuser material	Tempered Glass

### MECHANICAL DATA

Body material	Aluminum
Body colour	Black RAL9004
IP protection rate	IP66
IK protection rate	IK08


### FUNCTIONAL DATA

Working temperature	-40°C a 40°C
Lifespan (L70B10 25°)	>250.000h

### LOGISTICAL DATA

EAN code	8436546696698
Device dimensions	160x200x30mm
Device weight	1,0 kg
Units per box	16
Box dimensions	575x405x230mm
Box weight	18 kg

### DISTRIBUTION

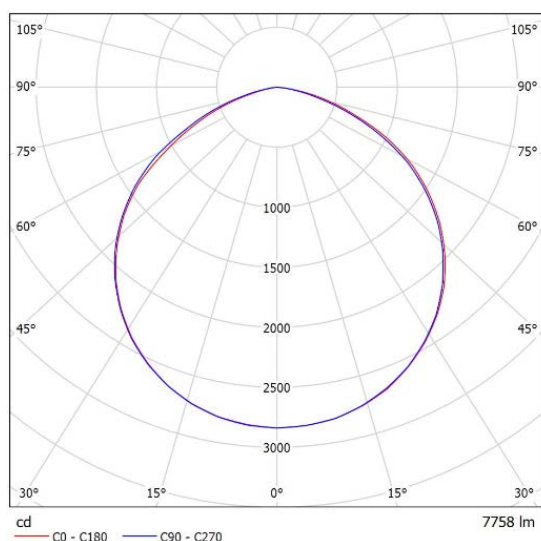

### DIMENSIONS

