



LED floodlight model FLS150CWD branded Silversun, 5 modules, beam angle 60°/90°, dimmable 1-10V. Silver aluminum body and polycarbonate optical lens. Color temperature 5000K, luminous flux 21.000 lm, color rendering index >70, power 150W, 100-277 VAC/ 50-60 Hz and IP65 protection rate. Dimensions length 320mm x height 370mm x width 123mm and weight 5,35 Kg. Installation bracket included.

## LUMINOUS DATA

Luminous flux	21.000 lm
Efficiency	140 lm/W
Color rendering index CRI	≥70
Color temperature	5000K
Chromatic consistency (sdcm)	1,3

## ELECTRICAL DATA

Power	150W
Rated voltage	100-277V AC
Frequency	50/60Hz
Power factor	≥0,95
Harmonic distortion	<20%
Inrush current	62A
Max units per MCB C16	4
Dimmable	1-10V
Driver	Internal
Class protection	Class I

## OPTICAL DATA

Beam angle	60°/90°
Diffuser model	Optical Lens
Diffuser material	Polycarbonate

## MECANICAL DATA

Body material	Aluminum
Body colour	Grey RAL7001
IP protection rate	IP65
IK protection rate	IK10


## FUNCTIONAL DATA

Working temperature	-40°C a 55°C
Lifespan (L70B10 25°)	>250.000h

## LOGISTICAL DATA

EAN code	8436546699194
Device dimensions	320x370x123mm
Device weight	5,35 kg
Units per box	1
Box dimensions	590x390x200mm
Box weight	7 kg

## DISTRIBUTION

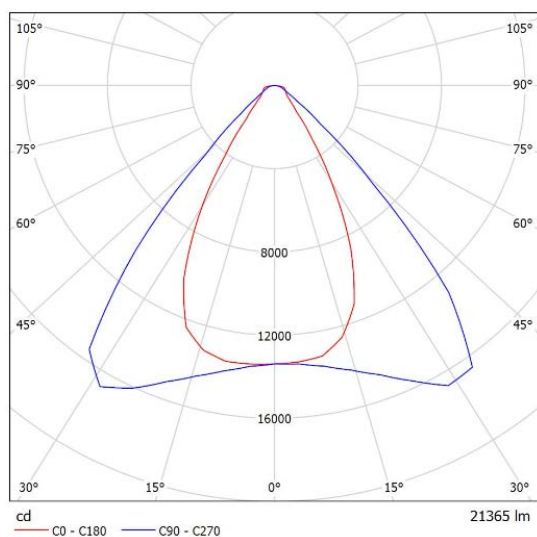

## DIMENSIONS

