



LED floodlight model FLS50NWD branded Silversun, 2 modules, beam angle 60°/90°, dimmable 1-10V. Silver aluminum body and polycarbonate optical lens. Color temperature 5000K, luminous flux 7.000 lm, color rendering index >70, power 50W, 100-277 VAC/ 50-60 Hz and IP65 protection rate. Dimensions length 320mm x height 155mm x width 123mm and weight 3,3 Kg. Installation bracket included.

LUMINOUS DATA

Luminous flux	7.000 lm
Efficiency	140 lm/W
Color rendering index CRI	≥80
Color temperature	4000K
Chromatic consistency (sdcm)	0,7

ELECTRICAL DATA

Power	50W
Rated voltage	100-277V AC
Frequency	50/60Hz
Power factor	≥0,95
Harmonic distortion	<20%
Inrush current	66A
Max units per MCB C16	16
Dimmable	1-10V
Driver	Internal
Class protection	Class I

OPTICAL DATA

Beam angle	60°/90°
Diffuser model	Optical Lens
Diffuser material	Polycarbonate

MECANICAL DATA

Body material	Aluminum
Body colour	Grey RAL7001
IP protection rate	IP65
IK protection rate	IK10


FUNCTIONAL DATA

Working temperature	-40°C a 55°C
Lifespan (L70B10 25°)	>250.000h

LOGISTICAL DATA

EAN code	8436546699484
Device dimensions	320x155x123mm
Device weight	3,3 kg
Units per box	1
Box dimensions	400x390x200mm
Box weight	4,3 kg

DISTRIBUTION

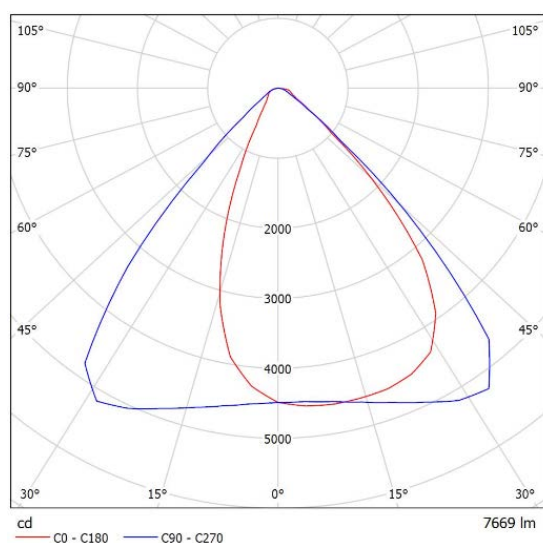

DIMENSIONS

