



Industrial LED floodlight model FLT150CW branded Silversun, beam angle 120°. Working temperature -40°C/+85°C. Black aluminum body and tempered glass transparent diffuser. Color temperature 5000K, luminous flux 16.500 lm, color rendering index >70, power 150W, 100-277 VAC/ 50-60 Hz and IP65 protection rate. Dimensions length 270mm x height 270mm x width 89mm and weight 8,10 Kg. Installation bracket included.

LUMINOUS DATA

Luminous flux	16.500 lm
Efficiency	110 lm/W
Colour rendering index CRI	≥70
Colour temperature	5000K
Colour chromatic (sdcM)	1,3

ELECTRICAL DATA

Power	150W
Rated voltage	100-277V AC
Frequency	50/60Hz
Power factor	≥0,95
Harmonic distortion THD	<20%
Inrush current	62A
Max units per MCB C16	4
Dimmable	No
Driver	External
Class protection	Class I

OPTICAL DATA

Beam angle	120°
Diffuser model	Transparent
Diffuser material	Tempered Glass

MECHANICAL DATA

Body material	Aluminum
Body colour	Black RAL9004
IP protection rate	IP65
IK protection rate	IK07


FUNCTIONAL DATA

Working temperature	-40°C a 85°C
Lifespan (L70B10 25°)	>132.000h

LOGISTICAL DATA

EAN code	8436546697664
Device dimensions	270x270x89mm
Device weight	8,1 kg
Units per box	1
Box dimensions	400x340x280mm
Box weight	9,0kg

DISTRIBUTION

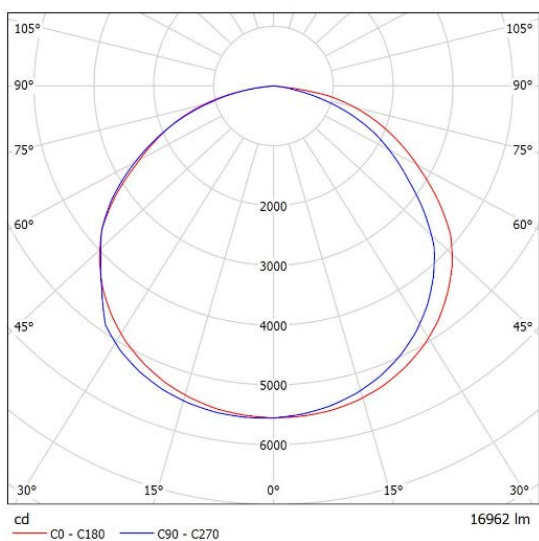

DIMENSIONS

