



LED Tri-proof model FX230CW2 branded SilverSun, 120cm length and beam angle 100°. White PVC body and milky polycarbonate diffuser. Colour temperature 5000K, luminous flux 4.200lm, color rendering index >80, power 30W, 85-265VAC / 50-60Hz and protection index IP65. Dimensions length 1200mm x width 124 mm x height 43mm and weight 2,3 Kg. Mounting clips included. Light source with energy efficiency class E

## LUMINOUS DATA

Luminous flux	4.200 lm
Efficiency	140 lm/W
Flux ErP Øuse (360°)	3.300 lm
Colour rendering index CRI	≥80
Colour temperature	5000K
Colour chromatic (sdcM)	2,1

## ELECTRICAL DATA

Power	30W
Rated voltage	85-265V AC
Frequency	50/60Hz
Power factor	≥0,97
Harmonic distortion THD	<15%
Inrush current	43A
Max units per MCB C16	10
Dimmable	No
Flickering (Pst LM)	0,077
Max units linkable	10
Driver	Integrated
Class protection	Class II

## OPTICAL DATA

Beam angle	100°
Diffuser model	Milky
Diffuser material	Polycarbonate

## MECHANICAL DATA

Body material	PVC
Body colour	White RAL9016
IP protection rate	IP65
IK protection rate	IK08


## FUNCTIONAL DATA

Working temperature	-20°C a 45°C
Lifespan (L70B10 25°)	>67.000h

## LOGISTICAL DATA

EAN code	8436546694526
Device dimensions	1200x124x43mm
Device weight	2,3 kg
Units per box	6
Box dimensions	1262x285x161mm
Box weight	16 kg

## DISTRIBUTION

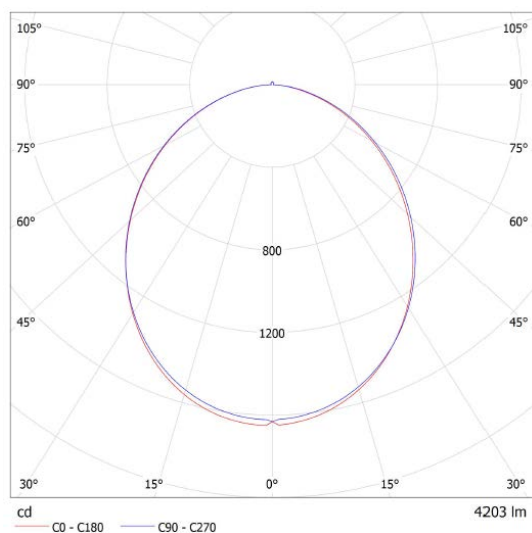

## DIMENSIONS

