



LED high bay model HBY100NWD branded Silversun, diameter 36cm, beam angle 110° and dimmable 1-10V. Black aluminum body with milky polycarbonate diffuser. Colour temperature 4000K, luminous flux 13.500 lm, colour rendering index >70, power 100W, 100-277 VAC/50-60Hz and protection index IP65. Dimensions, diameter 360mm x height 234mm, weight 4,7 Kg. Hanging hook included.

## DATOS LUMÍNICOS

Flujo luminoso	13.500 lm
Eficiencia	135 lm/W
Reproducción cromática	≥80
Temperatura de color	4000K
Consistencia cromática (sdcm)	1,0

## DATOS ELÉCTRICOS

Potencia	100W
Tensión nominal	100-277V AC
Frecuencia de red	50/60Hz
Factor de potencia	≥0,98
Distorsión armónica THD	<20%
Corriente de arranque	60A
Unidades máx por MCB C16	8
Regulable	1-10V
Fuente alimentación	Built in
Clase de protección	Class I

## OPTICAL DATA

Beam angle	110°
Diffuser model	Milky
Diffuser material	Polycarbonate

## MECHANICAL DATA

Body material	Aluminum
Body colour	Black RAL9004
IP protection rate	IP65
IK protection rate	IK08


## FUNCTIONAL DATA

Working temperature	-40°C a 50°C
Lifespan (L70B10 25°)	>250.000h

## LOGISTICAL DATA

EAN code	8436546699286
Device dimensions	Ø360x239mm
Device weight	4,5 kg
Units per box	1
Box dimensions	440x440x310mm
Box weight	5,5 kg

## DISTRIBUTION

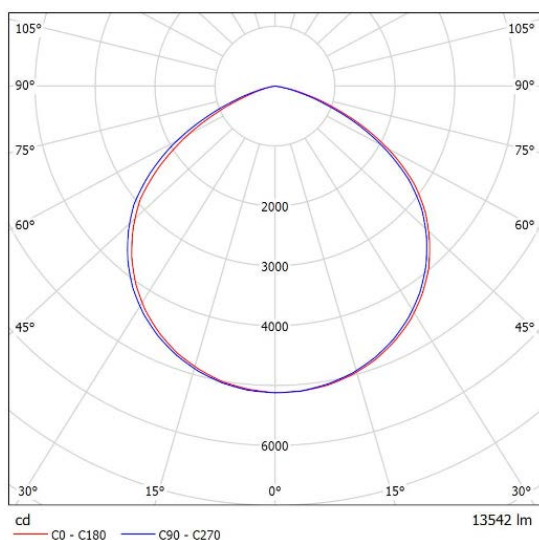

## DIMENSIONS

