



LED high bay model HBY150NWD branded Silversun, diameter 36cm, beam angle 90° and dimmable 1-10V. Black aluminum body with prismatic polycarbonate diffuser. Colour temperature 4000K, luminous flux 20.000 lm, colour rendering index >70, power 150W, 100-277 VAC/50-60Hz and protection index IP65. Dimensions, diameter 360mm x height 244mm, weight 4,7 Kg. Hanging hook included.

DATOS LUMÍNICOS

Flujo luminoso	20.000 lm
Eficiencia	133 lm/W
Reproducción cromática	≥80
Temperatura de color	4000K
Consistencia cromática (sdcm)	1,0

DATOS ELÉCTRICOS

Potencia	150W
Tensión nominal	100-277V AC
Frecuencia de red	50/60Hz
Factor de potencia	≥0,98
Distorsión armónica THD	<20%
Corriente de arranque	65A
Unidades máx por MCB C16	15
Regulable	1-10V
Fuente alimentación	Built in
Clase de protección	Class I

OPTICAL DATA

Beam angle	90°
Diffuser model	Prismatic
Diffuser material	Polycarbonate

MECHANICAL DATA

Body material	Aluminum
Body colour	Black RAL9004
IP protection rate	IP65
IK protection rate	IK08


FUNCTIONAL DATA

Working temperature	-40°C a 50°C
Lifespan (L70B10 25°)	>250.000h

LOGISTICAL DATA

EAN code	8436546698913
Device dimensions	Ø360x244mm
Device weight	4,7 kg
Units per box	1
Box dimensions	440x440x310mm
Box weight	6 kg

DISTRIBUTION

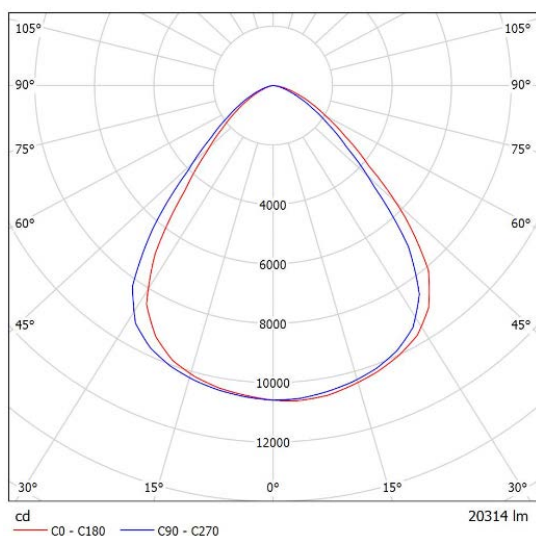

DIMENSIONS

