



LED high bay model HBYL150NW branded Silversun, diameter 32cm, beam angle 120°. Black aluminum body with semi-milky polycarbonate diffuser. Colour temperature 4000K, luminous flux 16.500lm, colour rendering index >70, power 150W, 220-240 VAC /50-60Hz and protection index IP65. Dimensions, diameter 320mm x height 155mm and weight 2,3 Kg. Hanging hook included.

LUMINOUS DATA

Luminous flux	16.500 lm
Efficiency	110 lm/W
Colour rendering index CRI	≥80
Colour temperature	4000K
Colour chromatic (sdcM)	1,0

ELECTRICAL DATA

Power	150W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,98
Harmonic distortion THD	≤10%
Inrush current	-
Max units per MCB C16	17
Dimmable	No
Driver	On board
Class protection	Class I

OPTICAL DATA

Beam angle	120°
Diffuser model	Semi milky
Diffuser material	Polycarbonate

MECANICAL DATA

Body material	Aluminum
Body colour	Black RAL9004
IP protection rate	IP66
IK protection rate	IK06


FUNCTIONAL DATA

Working temperature	-40°C a 45°C
Lifespan (L70B10 25°)	>250.000h

LOGISTICAL DATA

EAN code	8436546698920
Device dimensions	Ø320x155mm
Device weight	2,3 kg
Units per box	1
Box dimensions	342x342x197mm
Box weight	2,9 kg

DISTRIBUTION

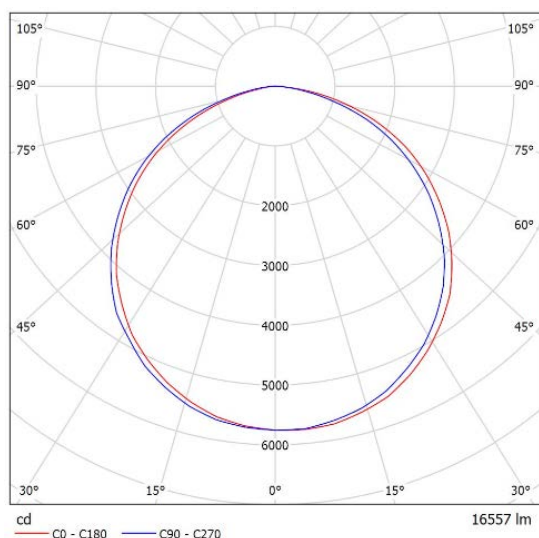

DIMENSIONS

