

Transparent Bi-directional hanging Led Panel model PDC48CC123D branded Silversun, 120x30cm, beam angle 120°. White aluminum body and prismatic polycarbonate transparent diffuser. Presettable colour temperature switch 300K-4000K-5400K, luminous flux 4.600 lm, color rendering index >80, power 48W, DALI, 220-240 VAC/ 50-60 Hz. Dimensions length 1195mm x width 272mm x height 17mm and weight 2,4 Kg. Hanging kit included.

LUMINOUS DATA

Luminous flux	4600 lm
Efficiency	96 lm/W
Colour rendering index CRI	≥80
Colour temperature	3000K-4000K-5400K
Colour chromatic (sdcm)	3,7 (3000K)

ELECTRICAL DATA

Power	48W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,95
Harmonic distortion THD	≤10%
Inrush current	8,31A
Max units per MCB C16	45
Dimmable	DALI
Driver	External
Class protection	Class I

OPTICAL DATA

Beam angle	120°
Diffuser model	Prismatic Transparent
Diffuser material	Polycarbonate

MECHANICAL DATA

Body material	Aluminum
Body colour	White RAL9016
IP protection rate	IP20
IK protection rate	IK06


FUNCTIONAL DATA

Working temperature	-20°C a 40°C
Lifespan (L70B10 25°)	>62.000h

LOGISTICAL DATA

EAN code	8436546698241
Device dimensions	1195x272x17mm
Device weight	2,4 kg
Units per box	4
Box dimensions	1290x360x210mm
Box weight	12 kg

DISTRIBUTION

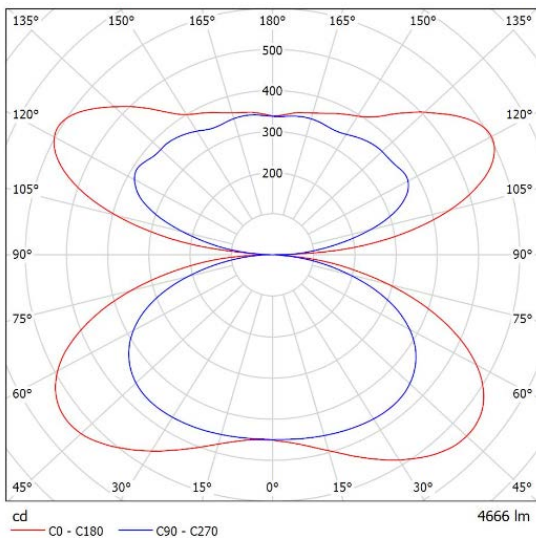

DIMENSIONS

