



Led Panel model PND35CC123U branded Silversun, 120x30cm, for installation in technical ceiling. Beam angle 95° and glare rating index UGR<19. White aluminum body and prismatic polycarbonate diffuser. Presettable colour temperature switch 3000K-4000K-5400K, luminous flux 3.600 lm, color rendering index >80, power 35W, 220-240 VAC/ 50-60 Hz. Dimensions length 1200mm x width 300mm x height 90mm and weight 2,4 Kg.

LUMINOUS DATA

Luminous flux	3600 lm
Efficiency	103 lm/W
Colour rendering index CRI	≥80
Colour temperature	3000K-4000K-5400K
Colour chromatic (sdcM)	1,0 (3000K)

ELECTRICAL DATA

Power	35W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,95
Harmonic distortion THD	≤15%
Inrush current	40 ^a
Max units per MCB C16	20
Dimmable	No
Driver	External
Class protection	Class II

OPTICAL DATA

Beam angle	95°
Diffuser model	Prismatic
Diffuser material	Polycarbonate

MECHANICAL DATA

Body material	Aluminum
Body colour	White RAL9016
IP protection rate	IP20
IK protection rate	IK06


FUNCTIONAL DATA

Working temperature	-20°C a 40°C
Lifespan (L70B10 25°)	>62.000h

LOGISTICAL DATA

EAN code	8436546698265
Device dimensions	1200x300x90mm
Device weight	2,4 kg
Units per box	1
Box dimensions	1260x350x170mm
Box weight	15,3 kg

DISTRIBUTION

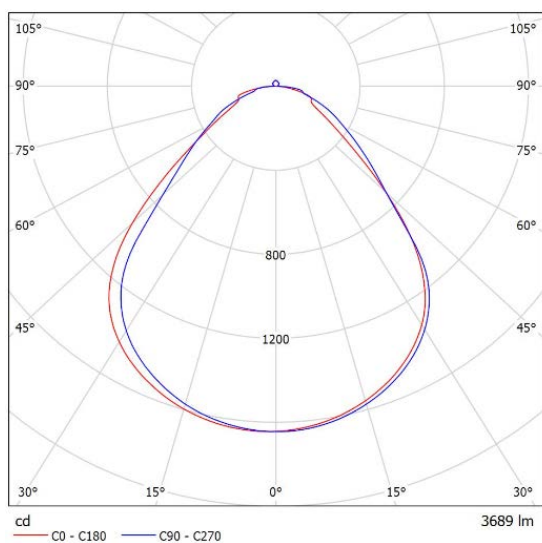

DIMENSIONS

