



LED recessed spotlight model RSPF138CC branded Silversun, diameter 8cm, beam angle 38°. White aluminum body and polycarbonate optical lens diffuser. Presettable colour temperature switch 3000K-4000K-6000K, luminous flux 950lm, color rendering index >80, power 10W, 220-240 VAC / 50-60Hz and protection index IP65. Dimensions diameter 82mm x height 50mm and weight 0,30 Kg. Cut out size 65mm.

LUMINOUS DATA

Luminous flux	950 lm
Efficiency	95 lm/W
Colour rendering index CRI	≥80
Colour temperature	3000K-4000K-6000K
Colour chromatic (sdcm)	3,2 (4000K)

MECHANICAL DATA

Body material	Aluminum
Body colour	White RAL9016
IP protection rate	IP65
IK protection rate	IK08
Cut out	65-70mm

LOGISTICAL DATA

EAN code	8436546699958
Device dimensions	Ø82x50mm
Device weight	0,30 kg
Units per box	40
Box dimensions	450x420x22mm
Box weight	10,5 kg

ELECTRICAL DATA

Power	10W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,9
Harmonic distortion THD	≤20%
Inrush current	3,4A
Max units per MCB C16	89
Dimmable	No
Driver	External
Class protection	Class II


OPTICAL DATA

Beam angle	38°
Diffuser model	Optical Lens
Diffuser material	Polycarbonate

FUNCTIONAL DATA

Working temperature	-20°C a 40°C
Lifespan (L70B10 25°)	>50.000h

DISTRIBUTION

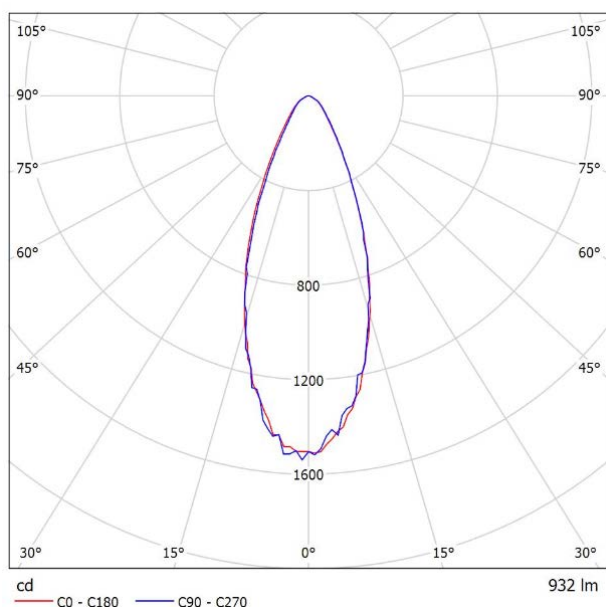

DIMENSIONS

