



Adjustable LED recessed square spotlight model RSPFS138CC branded Silversun, 11x11cm, beam angle 38°. White aluminum body and polycarbonate optical lens diffuser. Presettable colour temperature switch 3000K-4000K-6000K, luminous flux 1000lm, color rendering index >80, power 10W, 220-240 VAC / 50-60Hz and protection index IP20. Dimensions length 105mm x width 11mm x height 83mm and weight 0,50 Kg. Cut out size 100mm x 100mm.

LUMINOUS DATA

Luminous flux	1.000 lm
Efficiency	100 lm/W
Colour rendering index CRI	≥80
Colour temperature	3000K-4000K-6000K
Colour chromatic (sdcm)	3,2 (4000K)

MECHANICAL DATA

Body material	Aluminum
Body colour	White RAL9016
IP protection rate	IP20
IK protection rate	IK08
Cut out	100x100mm

LOGISTICAL DATA

EAN code	8436546694762
Device dimensions	110x110x83mm
Device weight	0,5 kg
Units per box	24
Box dimensions	500x425x280mm
Box weight	13,6 kg

ELECTRICAL DATA

Power	10W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,9
Harmonic distortion THD	≤20%
Inrush current	3,4A
Max units per MCB C16	89
Dimmable	No
Driver	External
Class protection	Class II


OPTICAL DATA

Beam angle	38°
Diffuser model	Optical Lens
Diffuser material	Polycarbonate

FUNCTIONAL DATA

Working temperature	-20°C a 40°C
Lifespan (L70B10 25°)	>50.000h

DISTRIBUTION

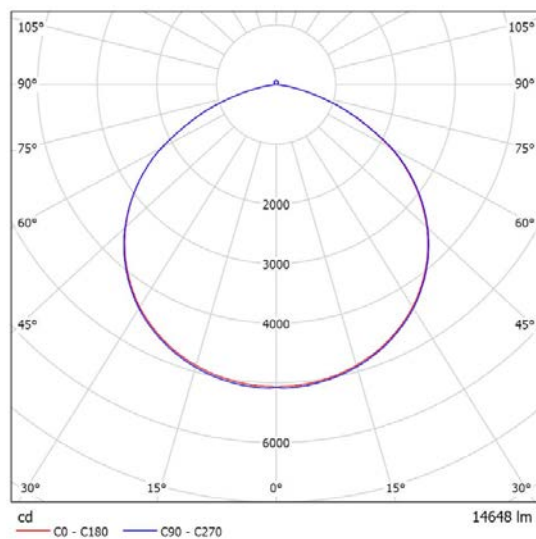

DIMENSIONS

