



LED Surface mounted lamp model SLI18CCS branded Silversun, beam angle 120°, with integrated motion sensor. White sheet metal base and polystyrene milky diffuser. Presettable colour temperature switch 3000K-4000K-6000K, luminous flux 1.400lm, colour rendering index >80, power 18W, 220-240VAC / 50-60Hz and protection index IP44. Dimensions diameter 360mm x height 105mm and weight 0,85 Kg.

LUMINOUS DATA

Luminous flux	1.400 lm
Efficiency	78 lm/W
Colour rendering index CRI	≥80
Colour temperature	3000K-4000K-6000K
Colour chromatic (sdcm)	0,9 (3000K)

ELECTRICAL DATA

Power	18W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,90
Harmonic distortion THD	≤20%
Inrush current	15A
Max units per MCB C16	21
Dimmable	No
Driver	Internal
Class protection	Class I

OPTICAL DATA

Beam angle	120°
Diffuser model	Milky
Diffuser material	Polystyrene

MECANICAL DATA

Body material	Steel
Body colour	White RAL9016
IP protection rate	IP44
IK protection rate	IK02


FUNCTIONAL DATA

Working temperature	-20°C a 40°C
Lifespan (L70B10 25°)	>113.000h

LOGISTICAL DATA

EAN code	8436546699118
Device dimensions	Ø360x105mm
Device weight	0,85 kg
Units per box	5
Box dimensions	610x420x430mm
Box weight	6,5 kg

DISTRIBUTION

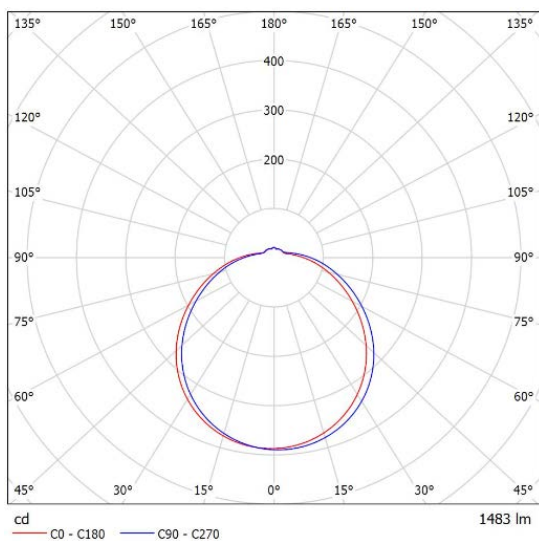

DIMENSIONS

