



LED Surface mounted lamp model SLO15CCR branded Silversun, beam angle 120°, with integrated motion sensor. PVC body and milky polycarbonate diffuser. Presetable colour temperature switch 3000K-4000K-6000K, luminous flux 1.725lm, colour rendering index >80, power 15W, 220-240VAC / 50-60Hz and protection index IP65. Dimensions diameter 220mm x height 50mm and weight 0,52 Kg.

### LUMINOUS DATA

Luminous flux	1.725 lm
Efficiency	115 lm/W
Colour rendering index CRI	≥80
Colour temperature	3000K-4000K-6000K
Colour chromatic (sdcm)	0,9 (3000K)

### ELECTRICAL DATA

Power	15W
Rated voltage	220-240V AC
Frequency	50/60Hz
Power factor	≥0,95
Harmonic distortion THD	≤20%
Inrush current	15A
Max units per MCB C16	21
Dimmable	No
Driver	Internal
Class protection	Class I

### OPTICAL DATA

Beam angle	120°
Diffuser model	Milky
Diffuser material	Polycarbonate

### MECANICAL DATA

Body material	PVC
Body colour	White RAL9016
IP protection rate	IP65
IK protection rate	IK08


### FUNCTIONAL DATA

Working temperature	-20°C a 40°C
Lifespan (L70B10 25°)	>113.000h

### LOGISTICAL DATA

EAN code	8436546698425
Device dimensions	Ø220x50mm
Device weight	0,52 kg
Units per box	20
Box dimensions	650x480x260mm
Box weight	12 kg

### DISTRIBUTION

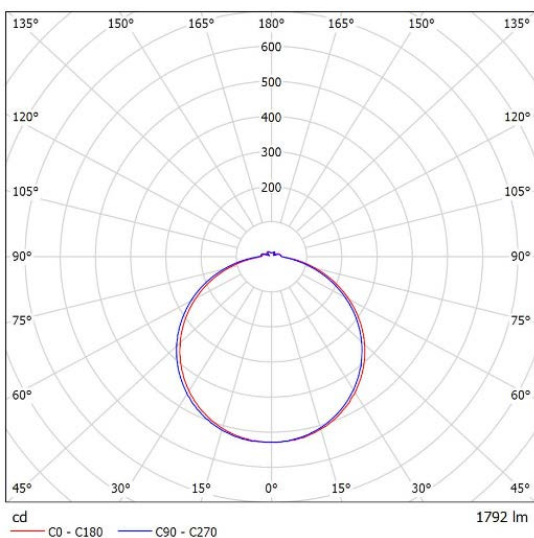

### DIMENSIONS

