



LED Surface mounted lamp model SLO15CCS branded Silversun, beam angle 120°, with integrated motion sensor. PVC body and milky polycarbonate diffuser. Presetable colour temperature switch 3000K-4000K-6000K, luminous flux 1.725lm, colour rendering index >80, power 15W, 220-240VAC / 50-60Hz and protection index IP65. Dimensions length 220mm x width 220mm x height 50mm and weight 0,52 Kg.

LUMINOUS DATA

| | |
|----------------------------|-------------------|
| Luminous flux | 1725 lm |
| Efficiency | 115 lm/W |
| Colour rendering index CRI | ≥80 |
| Colour temperature | 3000K-4000K-6000K |
| Colour chromatic (sdcm) | 0,9 (3000K) |

ELECTRICAL DATA

| | |
|-------------------------|-------------|
| Power | 15W |
| Rated voltage | 220-240V AC |
| Frequency | 50/60Hz |
| Power factor | ≥0,95 |
| Harmonic distortion THD | ≤20% |
| Inrush current | 15A |
| Max units per MCB C16 | 21 |
| Dimmable | No |
| Driver | Internal |
| Class protection | Class I |

OPTICAL DATA

| | |
|-------------------|---------------|
| Beam angle | 120° |
| Diffuser model | Milky |
| Diffuser material | Polycarbonate |

MECHANICAL DATA

| | |
|--------------------|---------------|
| Body material | PVC |
| Body colour | White RAL9016 |
| IP protection rate | IP65 |
| IK protection rate | IK08 |


FUNCTIONAL DATA

| | |
|-----------------------|--------------|
| Working temperature | -20°C a 40°C |
| Lifespan (L70B10 25°) | >113.000h |

LOGISTICAL DATA

| | |
|-------------------|---------------|
| EAN code | 8436546698418 |
| Device dimensions | 220x220x50mm |
| Device weight | 0,52 kg |
| Units per box | 20 |
| Box dimensions | 650x480x260mm |
| Box weight | 12 kg |

DISTRIBUTION

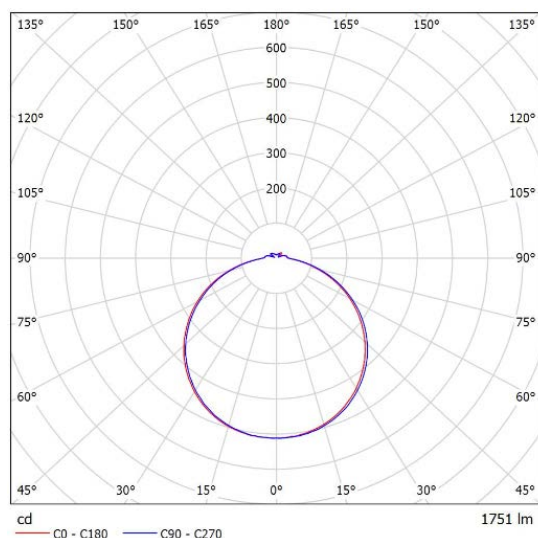

DIMENSIONS

