



LED Villa Luminaire model STV30NW branded SilverSun, diameter 45cm, beam angle 120°. Grey aluminum body with milky polycarbonate diffuser. Colour temperature 4000K, luminous flux 3.000lm, colour rendering index >80, power 30W, 120-277 VAC / 50-60Hz and protection index IP66. Dimensions diameter 452mm x height 470mm, weight 6,6 Kg.

LUMINOUS DATA

Luminous flux	3.000 lm
Efficiency	100 lm/W
Colour rendering index CRI	≥80
Colour temperature	4000K
Colour chromatic (sdcM)	1,7

ELECTRICAL DATA

Power	30W
Rated voltage	100-277V AC
Frequency	50/60Hz
Power factor	≥0,95
Harmonic distortion THD	<20%
Inrush current	66A
Max units per MCB C16	16
Dimmable	No
Driver	Built in
Class protection	Class I

OPTICAL DATA

Beam angle	120°
Diffuser model	Milky
Diffuser material	Polycarbonate

MECHANICAL DATA

Body material	Aluminum
Body colour	Grey RAL9007
IP protection rate	IP66
IK protection rate	IK08


FUNCTIONAL DATA

Working temperature	-30°C a 50°C
Lifespan (L70B10 25°)	>184.000h

LOGISTICAL DATA

EAN code	8436608660155
Device dimensions	Ø452x470mm
Device weight	6,6 kg
Units per box	1
Box dimensions	470x470x510mm
Box weight	7,6 kg

DISTRIBUTION

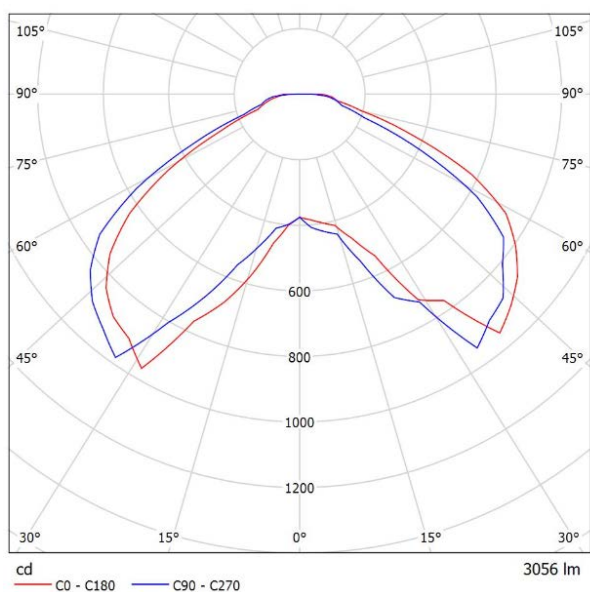

DIMENSIONS

